

# SOLUNA™

POWER DESIGNED FOR NIGHT AND DAY

## HIGH VOLTAGE BATTERY

### TECHNICAL SPECIFICATION



**10K & 15K PACK HV  
(L-E)**

(HV.2023A)

SOLUNA™

Www.soluna.co

Email: sales@solunabattery.com

Tel.: +86-21-57475835

# SOLUNA™

POWER DESIGNED FOR NIGHT AND DAY

The Soluna **HV Pack 10K/15K L-E** is a High-voltage LiFePO4 battery storage system designed specifically for households and small businesses. Pairing with a compatible hybrid inverter for flexible system design, daily storage and peak-shaving, and independent blackout protection provides swift instant power to appliances.

Batteries are pre-assembled, compact size with high capacity 10kWh/15kWh, and 10 mins fast on-site installation & connection, which greatly increase the efficiency of installers. And with a Soluna Wifi stick, the battery can be monitored from every location.

The parallel connection of up to 10 identical HV Packs allows the scalable capacity ranges from 10kWh to 150kWh, which offers more flexibility to customers' configurations.



## FEATURES

**High Voltage Design**



**Scalable to 150kWh**

**10-year Warranty**



**Long Lifespan**

**Compact & Easy Installation**



**Floor-Standing**

**Remote Upgrade & Monitoring**



**Black-start**

## TECHNICAL SPECIFICATIONS

### PHYSICAL CHARACTERISTICS

	10K PACK	15K PACK
Height (mm)	971	1205
Width (mm)	654	654
Depth (mm)	227	227
Weight (kg)	105	143
Installation	Floor-stand	

### ELECTRICAL CHARACTERISTICS

	10K PACK	15K PACK
Battery type	Lithium LFP	
Nominal capacity (kWh)	10	15
Usable capacity (kWh)	9	13.5
Nominal voltage (V)	268.8	384
Voltage range (usable) (V)	235.2-294	336-420
Charge voltage (V)	294	420
Discharge cut off voltage (V)	235.2	360
Charge/discharge current (nominal) (A)	20/20	20/20
Charge/discharge current (max.) (A)	40/40	40/40
Depth of discharge (DoD) (%)	90	90
DC disconnect	Contactor Fuse	

### OPERATING CONDITIONS

Operating temperature (°C)	-10 to 50
Operating temperature (recommended) (°C)	15 to 30
Storage temperature (°C)	-30 to 60
Humidity conditions (%)	5 to 95
Altitude (m)	Max. 2,000
Cooling strategy	Natural convection

### RELIABILITY AND CERTIFICATION

Certification	Cell: UL1642 UL9540A Battery module: IEC62619 & CE UL9540A & UL 1973
Hazardous materials classification	Class 9
Transportation	UN38.3
Ingress protection rating	IP 55
System configuration	1 to 10 parallel


### WARRANTY

Product and performance	10-year standard warranty
-------------------------	---------------------------

## TECHNICAL SPECIFICATIONS

### HV PARALLEL BOX

The Soluna HV Parallel Box connects multiple Soluna HV 10K & 15K Pack batteries for a combined energy output of up to 60 kWh (nominal) per cluster and a maximum capacity of up to 150 kWh, providing even greater energy independence and blackout protection 24/7.

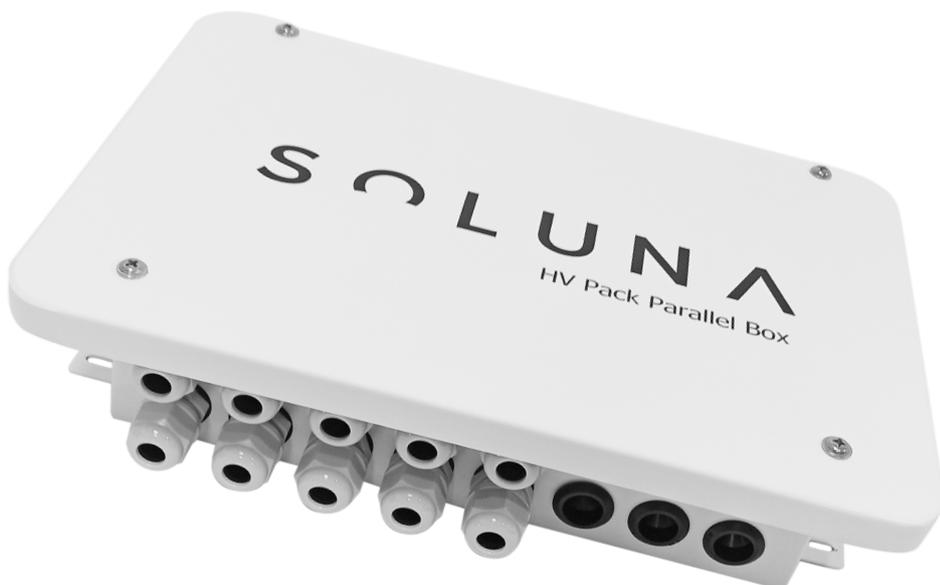

#### PHYSICAL CHARACTERISTICS

Height (mm)	86.2
Width (mm)	332.4
Depth (mm)	232.4
Weight (kg)	3.5

#### ELECTRICAL CONNECTING PORT

Working voltage (VDC)	530
Input current (max.) (A) (x 4)	50
Output current (max.) (A)	175
Input wiring (max.) (mm <sup>2</sup> ) (x 4)	10
Output wiring (max.) (mm <sup>2</sup> )	35

#### COMMUNICATION CONNECTING PORT

Communication connection port type	RJ45 (8P)
Input communication port (qty)	4
Output communication port (qty)	2


#### REGULAR PARAMETERS

Operating temperature range (° C)	-20 to 50
Storage stability range (° C)	-20 to 60
Relative humidity (% )	0 to 95
Ingress protection rating	IP54
Installation	Indoors only

## One step toward energy independence



## Diagram for 10 units parallel connection

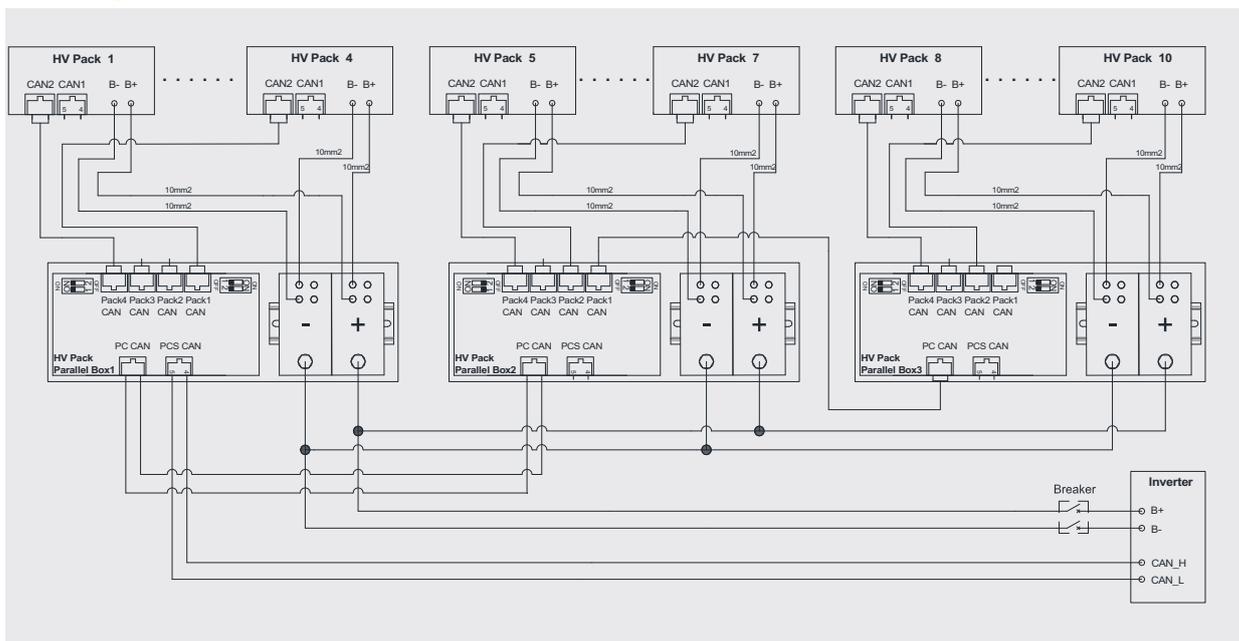

## TECHNICAL SPECIFICATIONS

### WIFI STICK

WiFi Stick is an internal data logger in the Soluna battery monitoring series.

By connecting with the HV battery through CAN 2 interface and checking working status from the 3 LEDs on the WiFi Stick, it can collect information from battery and transmit data to the web server, realizing remote monitoring for users including Fault Alarm, Firmware update and parameter setting through web portal and a direct connection configuration with Soluna E-Cloud APP for user as well.



#### PHYSICAL CHARACTERISTICS

Model Name	WiFi Stick RSW-1
Dimension (H*W*D)	122*49*30 mm
Weight (kg)	0.1
Installation	Insert+Screw

#### ELECTRICAL

Input Voltage	DC 5V
Power consumption	1.5W

#### COMMUNICATION CONNECTING PORT

Supported device type	Soluna 10K/15K Pack HV(L-E)
Data collection intervals	5 minutes
Indicator	LED *3
Communication Interface	USB
Wireless communication	2.4GHz~2.48GHz/ 802.11b/g/n
Configuration	APP

#### ENVIRONMENT

Operating temperature	-30°C~+70°C
Storage temperature	-40°C~+90°C
Operating humidity	10%-90%
Storage humidity	<50%
Warranty	2 Years

# SOLUNA™

POWER DESIGNED FOR NIGHT AND DAY



©Soluna Shanghai Co., Ltd., All rights reserved.  
\* All specifications are subject to change without notice.



SOLUNA™

Www.soluna.co

Email: sales@solunabattery.com

Tel.: +86-21-57475835